

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 October 2002 (31.10.2002)

PCT

(10) International Publication Number
WO 02/086437 A1

(51) International Patent Classification⁷: **G01M 3/26**,
3/20, 3/00, F04B 51/00, G08B 21/00

Milford, MA 01757 (US). **DUMAS, Robert, J.** [US/US];
8 Bradish Farm Road, Upton, MA 01568 (US).

(21) International Application Number: **PCT/US02/06540**

(74) Agent: **JANIUK, Anthony, J.**; Waters Investments Limited,
34 Maple Street, Milford, MA 01757 (US).

(22) International Filing Date: **1 March 2002 (01.03.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/272,934 **2 March 2001 (02.03.2001)** **US**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **WATERS INVESTMENTS LIMITED** [US/US]; 34 Maple Street, Milford, MA 01757 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **LUONGO, Joseph, A.** [US/US]; 7 Saddle Way, Walpole, MA 02081 (US). **CLAVARINI, Steven, J.** [US/US]; 27 Rome Avenue, Bellingham, MA 02019 (US). **TACCONI, Robert, Q.** [US/US]; 142 South Street, Medfield, MA 02052 (US). **RUBINO, Frank, A.** [US/US]; 243 Central Street, Apt. 4,

Published:

— *with international search report*

[Continued on next page]

(54) Title: **METHODS AND APPARATUS FOR DETERMINING THE PRESENCE OR ABSENCE OF A FLUID LEAK**

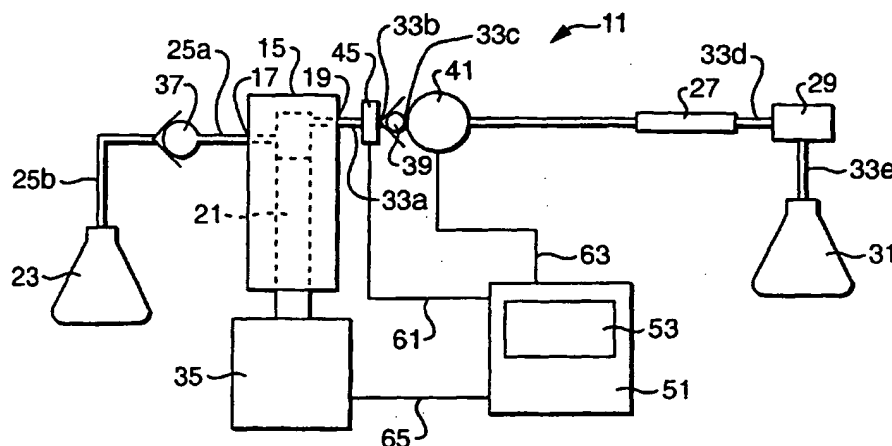

(57) Abstract: Method and apparatus for detecting leaks or defects, including component failure and adverse performance, in a fluid pumping system having a pumping chamber, piston (21), motor (35), inlet, outlet, inlet valve, switchable valve and detector (29). The inlet valve (37) is in fluid communication with the inlet (17) while the switchable valve (41) is in fluid communication with the outlet (19). A pressure measuring device (45) is in fluid communication with the pumping chamber (15) between the inlet valve and switchable valve so as to determine a minimal pressure together with first and second threshold pressures measured at first and second times that correspond to first and second threshold pressure signals. A control means (51) calculates the slope of a line representing the difference of such first and second threshold pressure signals over time so as to compare the slope to a threshold decay value, or to compare the minimal pressure to minimal acceptable values, thus defining pump defects.

BEST AVAILABLE COPY

WO 02/086437 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHODS AND APPARATUS FOR DETERMINING THE PRESENCE OR ABSENCE OF A FLUID LEAK

FIELD OF THE INVENTION

5 This invention relates to analytical and diagnostic instruments in which a pump induces a flow of fluid. Embodiments of the present method and apparatus determine the presence or absence of a leak by placing a fluid under pressure by operating a pump and measuring the pressure in a conduit over time. The decay of the pressure over time is compared to a predetermined rate of decay. A rate of decay greater than the threshold
10 value suggests a leak in the hydraulic components under pressure including conduits, fittings, seals, valves or pump components. The measurement of decay over time can be compared to the threshold value or dynamic threshold values as the instrument is operated. Embodiments of the present invention have special application with respect to multi-chambered pumps. Each pump chamber can be used to place a fluid under pressure with
15 different conduits, valves and seals.

BACKGROUND OF THE INVENTION

By way of background, the following terms will be used in this application with the meaning ascribed thereto.

20 The term "component defect" is used to mean that the apparatus can not attain or maintain a normal set point. In the context of a pump, a common component defect is often a leak but also encompasses the failure of sensing devices such as transducers or computing devices. As used herein, the term "leak" refers to a hole, crack or opening through which fluid escapes in a manner not intended by the user. The leak may be totally
25 internal. That is, the fluid escapes from an area of high pressure to an area of low pressure within the apparatus. Or, such leak may be external, allowing fluid to escape from the confines of the hydraulic circuit. Leaking flammable fluids represent a safety concern, the detection of which would be very useful.

 The term "solution failure" is used to suggest an absence of fluid, gases in solution
30 or a partial filling of the pump assembly with fluid.

A "pump" is a mechanical device for moving fluids. Embodiments of the present invention have particular application to high pressure pumps used in analysis and diagnostics. By way of example, without limitation, pumps used in high performance

liquid chromatography are capable of placing a fluid under as much as 10,000 psi. Such pumps can be single chamber pumps or multi-chambered pumps. One common multi-chambered pump is a serial pump in which a plurality of, usually two, pumping chambers are placed in series. That is, the flow of fluid first passes through a first pump chamber and then a second pump chamber. Another common multi-chambered pump is a parallel pump in which a plurality of, usually two, pumping chambers are placed in parallel. That is, fluid is received by a first chamber, which chamber brings the fluid to pressure and propels such fluid downstream without involving a further pump chamber. As the first pump chamber is exhausted, a second pump chamber starts to propel fluid. Parallel pumps are often equipped with rotary valves which control the outflow of the plurality of pump chambers.

As used herein, the term "control means" means control circuitry and /or computer programmable unit (CPU).

As used herein, "pressure measuring device" comprise any device for measuring pressure, including strain gauges and pressure transducers.

Valves are devices for closing, opening or directing fluid flow. Typical valves include such mechanical check valves and active valves. Mechanical check valves are responsive to pressure. Active valves receive a signal which directs power means, such as motors, solenoids and the like, to open or close the valve. Cycling valves are capable of selectively opening and closing the flow of fluid from one or more sources or directing the flow to one or more destinations. Cycling valves are used in parallel pumps to alternate the outlet flow from multiple pump chambers.

Current techniques require manual intervention to determine the integrity of a hydraulic system. It would be advantageous to have methods and apparatus capable of performing operations which determine the presence or absence of a leak in a hydraulic system under pressure. Such methods and apparatus would be able to ascertain a problem in a system and alert the operator, or shut the operation down until the problem can be remedied.

SUMMARY OF THE INVENTION

Embodiments of the present invention feature methods and apparatus which facilitate the detection of leaks, solution failures and poor performance of various components of a pump. One embodiment of the present invention is a pumping apparatus for pumping fluid. The pumping apparatus comprises at least one pumping chamber

having an inlet and an outlet. The pumping chamber has a piston for movement in the chamber which piston propels the fluid from the chamber. The inlet is for receiving fluid from a fluid supply and the outlet is for discharging the fluid from the chamber. At least one motor powers the piston in the pumping chamber. The motor operates in pumping mode upon receiving a pumping signal. At least one inlet valve is in fluid communication with the inlet of the pumping chamber. The inlet valve has an open position and a closed position. At least one switchable valve is in fluid communication with the outlet of the pumping chamber. The switchable valve has a closed position and an open position. The switchable valve assumes a closed position upon receiving a close signal. At least one first pressure measuring device is in fluid communication with the pumping chamber, between the inlet valve and switchable valve. The pressure measuring device produces a pressure signal in response to pressure. The apparatus further comprises control means for receiving the pressure signal, for sending a close signal to the switchable valve and for sending a pumping signal to the motor. The control means has a test mode in which the control means sends a pumping signal to the motor, sends a close signal to the switchable valve to cause the fluid in the pump chamber to be placed under a pressure. Preferably, the first pressure measuring device determines a minimal pressure at a first time and sends a minimal pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance and the presence of solution. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure. Preferably, the first pressure measuring device determines at least one first threshold pressure at a first threshold time and sends a first threshold pressure signal to the control means. And, the first pressure measuring device determines at least one second threshold pressure at a second time and sends a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a threshold decay value. The threshold decay value represents a leak in the pump or a defect in the apparatus. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or not attaining the minimal acceptable value.

The error message may be in the form of a message placed on a monitor associated with control means or the control means may turn off or render the apparatus non-functional until leaks or under-performing components are replaced or repaired.

As used herein, control means may take the form of circuitry or more preferably,
5 one or more computer programmable units (CPUs) with appropriate software.

Preferably, the apparatus further comprises a check valve interposed in fluid communication between the pump chamber and the switchable valve.

Preferably, the apparatus has a start up mode in which the control means is turned on and the control means engages the test mode upon start up, to test for leaks and
10 acceptable pump performance.

Embodiments of the apparatus may have more than one pumping chamber. One of the apparatus further comprises two pump chambers, a first pump chamber and a second pump chamber in series. That is, the first pump chamber receives fluid from a fluid supply and is in fluid communication with the second chamber. The second chamber
15 discharges the fluid to the switchable valve. At least one check valve is interposed in fluid communication with the first pump chamber and the second pump chamber.

Preferably, the apparatus with two pump chambers comprises two motors, a first motor mechanically linked to the first pump chamber and a second motor mechanically linked to the second pump chamber. And, in the test mode the control means sends a
20 signal to the first motor and second motor.

Preferably, in the test mode the control means sends a pumping signal to the second motor, sends a close signal to the switchable valve to cause the fluid in the second chamber to be placed under a pressure. The first pressure measuring device determines at
25 least one minimal pressure at a first time and sends a first pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump. Preferably, the first pressure measuring device determines at least one
30 first threshold pressure at a first time and a second threshold pressure at a second time, and sends a first threshold pressure signal and a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and

compares the slope with a threshold decay value, where the threshold decay value represents a defect in the pump. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or in response to failure to attain the minimal acceptable value indicating one or more leaks in the check
5 valve or the pump apparatus in fluid communication with the second pump chamber under pressure or other defect.

Preferably, in the alternative or in addition, in the test mode the control means sends a pumping signal to the first motor, sends a close signal to the switchable valve to cause the fluid in the first chamber to be placed under a pressure. The first pressure
10 measuring device determines at least one minimal pressure and sends a minimal pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump. Preferably, the first pressure measuring device
15 determines at least one first threshold pressure at a first time and a second threshold pressure at a second time. The first pressure measuring device sends a first pressure signal and a second pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value, which threshold
20 decay value represents a defect in the pump. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or in response to failure to attain the minimal acceptable value indicating one or more defects in the pump, such as, leaks in the inlet valve or the pump apparatus in fluid communication with the first pump chamber under pressure.

25 Preferably, the apparatus of further comprises a second pressure measuring device interposed in fluid communication between the first pump chamber and the check valve. In the test mode the control means sends a pumping signal to the first motor, to cause the fluid in the first chamber to be placed under a pressure. The second pressure measuring device determines at least one first minimal pressure and sends a minimal pressure signal
30 to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure. Preferably, the second pressure

measuring device determines at least one first threshold pressure at a first time and a second threshold pressure at a second time. The second pressure measuring device sends a first threshold pressure signal and sends a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a threshold decay value, which threshold decay value represents a defect in the pump. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or in response to failure to attain the minimal acceptable value indicating one or more defects in the pump, such as, leaks in the inlet valve or check valve or the pump apparatus in fluid communication with the first pump chamber under pressure.

Preferably, the control means receives a first set of pressure values from the first pressure measuring device and a second set of pressure values from the second pressure measuring device and compares the values to determine errors in the performance of the pressure measuring devices or leaks in the apparatus or defects in the pump.

Embodiments of the present invention are useful in pumps having a parallel configuration. One embodiment comprises an apparatus further comprising two pump chambers, two inlet valves and two outlet valves and a switchable valve. The pump chambers comprise a first pump chamber and a second pump chamber. The first pump chamber and second pump chamber are in parallel with the first pump chamber receiving fluid from a fluid supply via a first inlet valve and the second pump chamber receiving fluid from a fluid supply via a second inlet valve. The first pumping chamber discharges fluid via a first outlet check valve and the second pumping chamber discharges fluid via a second outlet check valve. The first outlet check valve and the second outlet check valve are in fluid communication with a switchable valve.

Preferably, the apparatus further comprises two pressure measuring devices and two motors. The motors comprise a first motor mechanically linked to the first pump chamber and a second motor mechanically linked to the second pump chamber. The two pressure measuring devices comprise a first pressure measuring device and a second pressure measuring device. The first pressure measuring device is interposed in fluid communication between the first pumping chamber and the first check valve and the second pressure measuring device is interposed in fluid communication between the

second pumping chamber and the second check valve. The two pressure measuring devices allow the first pump chamber and the second pump chamber to be placed in test mode independent of each other.

Preferably, in the test mode, the control means directs one of the motors to go into
5 pumping mode which places one of the first or second pump chamber under pressure and such apparatus in fluid communication with the pump chamber under pressure through to the opposite check valve. In this manner, the outlet check valve of the opposite pump chamber can be tested in a parallel pump. And, of course, in the test mode, first one motor of one pump chamber is placed in pump mode and then the opposite motor of the opposite
10 pump chamber is placed in pump mode to allow testing of both outlet check valves.

Preferably, the control means receives a first set of pressure values from the first pressure measuring device and a second set of pressure values from the second pressure measuring device and compares the values. Differences in the values suggest errors in the performance of the pressure measuring devices, the first or second pump chambers, the
15 first and second inlet valves or the outlet check valves. The values may also be compared to minimal acceptable values and threshold decay values.

A further embodiment of the present invention features a method of testing the performance of a pumping apparatus for pumping fluid. The method comprising the steps of providing a pumping apparatus having at least one pumping chamber having an inlet
20 and an outlet. The pumping chamber has a piston for movement in the chamber which piston propels the fluid from the chamber. The inlet receives fluid from a fluid supply and the outlet for discharges the fluid from the chamber. At least one motor for powering the piston in the pumping chamber, the motor operating in pumping mode upon receiving a pumping signal. At least one inlet valve is in fluid communication with the inlet of the
25 pumping chamber. The inlet valve has an open position and a closed position. At least one switchable valve is in fluid communication with the outlet of the pumping chamber. The switchable valve has a closed position and an open position, and assumes the closed position upon receiving a close signal. At least one first pressure measuring device is in fluid communication with the pumping chamber, between the inlet valve and switchable
30 valve. The pressure measuring device produces a pressure signal in response to pressure. Control means, for receiving the pressure signal, for sending a close signal to the at least one switchable valve and for sending a pumping signal to the motor, has a test mode. In the test mode, the control means sends a pumping signal to the motor, sends a close signal

to the switchable valve to cause the fluid in the chamber to be placed under a pressure. Preferably, the first pressure measuring device determines at least one minimal pressure and sends a first pressure signal to the control means. The control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value
5 represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure. Preferably, the first pressure measuring device determines at least one first threshold pressure at a first time and a second threshold pressure at a second time. The pressure measuring device sends the first threshold pressure signal and the second threshold pressure signal to the
10 control means. The control means calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a threshold decay value, representing a defect in the pump. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or the pump failing to attain the minimal
15 acceptable value. The method further comprises the step of operating the apparatus in test mode.

Preferably, the apparatus has a start up mode in which the control means is turned on and the control means engages the test mode upon start up to test for defects.

In a series configuration, with two pump chambers, comprising a first pump
20 chamber and a second pump chamber, the first pump chamber receives fluid from a fluid supply and is in fluid communication with the second chamber. The second chamber discharges the fluid to the switchable valve. At least one check valve is interposed in fluid communication with the first pump chamber and the second pump chamber. Preferably, the apparatus further comprises two motors, a first motor mechanically linked to the first
25 pump chamber and a second motor mechanically linked to the second pump chamber. In the test mode, the control means sends a signal to the first motor and second motor.

And, in the test mode, the control means sends a pumping signal to the second motor, and sends a close signal to the switchable valve to cause the fluid in the second chamber to be placed under a pressure. The first pressure measuring device determines at
30 least one minimal pressure at a first time and sends a minimal pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value

suggests a defect in the pump or solution failure. Preferably, the first pressure measuring device determines at least one first threshold pressure at a first time and a second threshold pressure at a second time. The first pressure measuring device sends a first threshold pressure signal and a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a threshold decay value, representing a leak in the pump. The control means sends one or more error messages to the operator in response to the slope exceeding the threshold value indicating one or more leaks in the check valve or the pump apparatus in fluid communication with the second pump chamber under pressure.

Preferably, in the test mode, the control means sends a pumping signal to the first motor, and sends a close signal to the switchable valve to cause the fluid in the first chamber to be placed under a pressure. The first pressure measuring device determines at least one minimal pressure and sends a minimal pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure. Preferably, the first pressure measuring device determines at least one first threshold pressure at a first time and second threshold pressure at a second time. The first pressure measuring device sends a first threshold pressure signal and a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value, representing a defect in the pump. The control means sending one or more error messages to the operator in response to the slope exceeding the threshold decay value indicating one defects such as one or more leaks in the inlet valve or the pump apparatus in fluid communication with the first pump chamber under pressure.

Preferably, the apparatus further comprises a second pressure measuring device interposed in fluid communication between the first pump chamber and the check valve. In the test mode, the control means sends a pumping signal to the first motor, to cause the fluid in the first chamber to be placed under a pressure. The second pressure measuring device determines a minimal pressure and sends a minimal pressure signal to the control means. Preferably, the control means compares the minimal pressure with a minimal

acceptable value. The minimal acceptable value represents a value that is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump. Preferably, the second pressure measuring device determines at least one first threshold pressure at a first time and a second threshold pressure at a second time.

5 The second pressure measuring device sends a first threshold pressure signal and a second threshold pressure signal to the control means. The control means calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value, representing a defect in the pump. The control means sends one or more error messages to the operator in

10 response to the slope exceeding the threshold decay value or failure to attain the minimal acceptable value indicating one or more defects in the pump such as leaks in the inlet valve or check valve or the pump apparatus in fluid communication with the first pump chamber under pressure.

Preferably, the control means receives a first set of pressure values from the first

15 pressure measuring device and a second set of pressure values from the second pressure measuring device and compares the values to determine errors in the performance of the pressure measuring devices or leaks in the apparatus.

Embodiments of the present method apply to parallel pumps. In a parallel pump, the apparatus further comprises two pump chambers, two inlet valves and two outlet

20 valves. The pump chambers comprising a first pump chamber and a second pump chamber with the first pump chamber receiving fluid from a fluid supply via a first inlet valve and the second pump chamber receiving fluid from a fluid supply via a second inlet valve. The first pumping chamber discharges fluid via a first outlet check valve and the second pumping chamber discharges fluid via a second outlet check valve. The first outlet

25 check valve and the second outlet check valve are in fluid communication with the switchable valve. Preferably, the apparatus comprises two pressure measuring devices and two motors. The motors comprise a first motor mechanically linked to the first pump chamber and a second motor mechanically linked to the second pump chamber. The two pressure measuring devices comprise a first pressure measuring device and a second

30 pressure measuring device. The first pressure measuring device is interposed in fluid communication between the first pumping chamber and the first check valve and the second pressure measuring device is interposed in fluid communication between the second pumping chamber and the second check valve. The configuration allows the first

pump chamber and the second pump chamber to be placed in test mode independent of each other.

In the test mode, the control means directs one of the motors to go into pumping mode which places one of the first or second pump chamber under pressure and such apparatus in fluid communication with the pump chamber under pressure through the opposite check valve. The test mode allows testing of the outlet check valve of the opposite pump chamber. And, in the test mode first one motor of on pump chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of both outlet check valves.

Preferably, the control means receives a first set of pressure values from the first pressure measuring device and a second set of pressure values from the second pressure measuring device and compares the values to determine errors in the performance of pressure measuring devices, the first or second pump chambers, the first and second inlet valves and the outlet check valve.

Further features and advantages of the present invention will be apparent upon reading the detailed description which follows and viewing the drawings that are described in summary form below.

Brief Description of the Drawings

- Figure 1 depicts a single chamber pump apparatus embodying features of the present invention;
- Figure 2 depicts a dual chamber series pump apparatus embodying features of the present invention;
- Figure 3 depicts a dual chamber parallel pump apparatus embodying features of the present invention; and,
- Figure 4 graphically depicts a pressure plot from a pressure measuring device over time and threshold value.

DETAILED DESCRIPTION

Embodiments of the present invention feature methods and apparatus which facilitate the detection of leaks and poor performance of various components of a pump. One embodiment of the present invention is a pumping apparatus for pumping fluid. However, embodiments of the present invention have applications in all fluid application in which information regarding the integrity of seals and fittings and the like is desirable.

Thus, the present detailed description should be construed as an exemplification of the invention and not limiting the invention to the details provided.

Turning now to Figure 1, a pumping apparatus, generally designated by the numeral 11, is illustrated. Pumping apparatus is of the type normally associated with chromatographic applications. The pumping apparatus 11 has one pumping chamber 15 having an inlet 17 and an outlet 19. The pumping chamber 15 has a piston 21 for movement in the chamber 15. Piston 21 propels the fluid from the chamber. The inlet 17 is for receiving fluid from a fluid supply 23 through conduits 25a and 25b. The outlet 19 is for discharging the fluid from the chamber to a downstream chromatographic column 27, a detector 29 and a waste receptacle 31 via conduits 33a, 33b, 33c, 33d and 33e.

A motor 35 powers the piston 21 in the pumping chamber 15 through any number of mechanical devices, such as cams or spindle drives [not shown] known in the art. The motor 35 operates in pumping mode upon receiving a pumping signal.

Inlet valve 37 is in fluid communication with the inlet 17 of the pumping chamber 15 by a suitable conduit 25a or by incorporation into the pump head [not shown]. The inlet valve 37 has an open position and a closed position. Preferably, the apparatus 11 further comprises a check valve 39 in fluid communication with the pump chamber 15 downstream of the pump chamber 15. Inlet valve 37 and check valve 39 may be of standard design and features and are available from a number of vendors.

A switchable valve 41 is in fluid communication with the outlet 19 of the pumping chamber 15. The switchable valve 41 has a closed position and an open position. The switchable valve 41 assumes a closed position upon receiving a close signal. Switchable valve 41 may be solenoid controlled or a powered rotating valve. A suitable valve is a multi-position valve sold by Valco Instruments Co. Inc. (Houston, Texas USA).

A pressure measuring device 45 is in fluid communication with the pumping chamber 15, between the inlet valve 37 and switchable valve 41. The pressure measuring device 45 is, preferably, a pressure transducer which produces a pressure signal in response to pressure. A suitable pressure transducer is a transducer sold by DJ Instruments (Billerica, Massachusetts USA)

The apparatus 11 further comprises control means 51 for receiving the pressure signal via line 61, for sending a close signal to the switchable valve 41 via line 63 and for sending a pumping signal to the motor 35 via line 65. The control means 51 is preferably a computer equipped with an operator interface such as monitor or display 53. Suitable

computers are available from numerous vendors and include such personal computers having an IBM format or Apple operating system.

The apparatus 11 has a test mode in which the control means 51 sends a pumping signal to the motor 35, sends a close signal to the switchable valve 41 to cause the fluid in the pump chamber 15 to be placed under a pressure. The pressure measuring device 45 determines at least one minimal pressure and sends a minimal pressure signal to the control means 51. Preferably, the control means 51 compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump. For a chromatographic pump, such minimal acceptable value may be set at a value from 50 psig to 5000 psig or some other value appropriate for the application for which the pump will be used. A preferred value is between 200 and 500 psig. The time in which the minimal pressure may be determined corresponds to a predetermined stroke position which normal operation will give a value equal or above the minimal acceptable value.

The pressure measuring device 45 determines at least one first threshold pressure at a first time and at least one second pressure at a second time. The first and second time are chosen for a period of time in which the normal pressure decay rate is approximately linear. That is, pressure decay in a normal pump typically is exponential, with the greatest loss of pressure soon after the maximum pressure is attained and falling more steadily thereafter.

The pressure measuring device 45 sends a first threshold pressure signal and sends a second threshold pressure signal to the control means 51. The control means 51 calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value. The threshold decay value represents a defect in the pump apparatus 11, most likely attributable to a leak. The threshold decay value is preferably determined empirically based upon values and times known to be a characteristic of pump apparatus 11 with acceptable performance. For a parallel pump, used in preparative chromatography applications, a threshold decay value of 100 to 400 psig per minute is preferred. The time between the first and second pressure signal is, preferably, between 0.05 to 3.0 minutes and most preferably, 0.2 to 1.0 minute. In a parallel pump, the period after the maximum

pressure is attained and the first threshold pressure is taken is approximately 0.5 to 1.5 minute.

The control means 51 sends one or more error messages to display 53 to the operator in response to the slope exceeding the threshold decay value. In the alternative or
5 in addition, the control means 51 may turn the apparatus off or place it on stand by status until the control means 51 is reset or repairs made on the apparatus 11.

Preferably, the apparatus 11 has a start up mode in which the control means 51 is turned on and the control means 51 engages the test mode to test for leaks. Software controls to effect the comparisons between test values and predetermined values, to
10 provide error messages and/or stop equipment functions are designed to be consistent with the control circuitry and underlying software of the equipment. These software controls, as described herein, are within the skill of competent software engineers.

The apparatus 11, in test mode, preferably performs a dynamic evaluation of the
15 leak. Control means 51 directs motor 35 to pump fluid at constant pressure. In the event motor 35 is a stepper motor or the piston 21 is equipped with a position sensor [not shown], the steps or position are tracked over time and the volume of the leak is determined by the control means 51.

In operation, the operator starts the apparatus by activating an "on" switch
20 or booting the control means 51. At start up, the control means 51 initiates a test mode. The control means 51 sends a pumping signal to the motor 35, sends a close signal to the switchable valve 41 to cause the fluid in the chamber to be placed under a pressure. The pressure measuring device 45 determines a minimal pressure at a first time and sends a minimal pressure signal to the control means 51. Preferably, the control means 51
25 compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure.

The pressure measuring device 45 determines at least one first threshold pressure at a first time and a second threshold pressure at a second time. The pressure measuring
30 device sends a first threshold pressure signal and a second threshold pressure signal to the control means 51. The control means 51 calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a threshold decay value, representing a defect in

the apparatus 11 most likely associated with a leak. The control means 51 sends one or more error messages to the operator in response to the slope exceeding the threshold decay value. The defect or leak may further be characterized by control means which directs the motor 35 in a manner of constant pressure by monitoring the pressure via a feed back from the pressure measuring device 45.

Embodiments of the apparatus may have more than one pumping chamber. One of the apparatus further comprises two pump chambers, a first pump chamber and a second pump chamber in series. Such a series pump apparatus is generally depicted in Figure 2, by reference number 111. Serial apparatus 111 has a first pump chamber 115a having an inlet 117a and outlet 119a. First pump chamber 115a receives fluid from a fluid supply 123 via conduits 125a and 125b through an inlet check valve 137. Serial pump 111 has a second pump chamber 115b having an inlet 117b and outlet 119b. First pump chamber 115a is in fluid communication with the second pump chamber 115b via conduits 171a, 171b and 171c. Check valve 173 is in fluid communication with the first pump chamber 115a and the second pump chamber 115b.

The second pump chamber 115b discharges fluid to the switchable valve 141 via conduits 133a and 133b. Conduits 133c, 133d and 133e connect switchable valve 141 to chromatography column 127, detector 129 and waste receptacle 131.

A first pressure measuring device 139a is in fluid communication with first pump chamber 115a interposed between such chamber and check valve 173. A second pressure measuring device 139b is in fluid communication with the second pump chamber 115b interposed between such chamber and the switchable valve 141.

The apparatus 111 has two motors, a first motor 135a mechanically linked to the first pump chamber 115a and a second motor 135b mechanically linked to the second pump chamber 115b.

The apparatus 111 further comprises control means 151 for receiving the pressure signals via lines 161a and 161b, for sending a close signal to the switchable valve 141 via line 163 and for sending a pumping signal to the motors 135a and 135b via lines 165a and 165b. The control means 151 is preferably a computer equipped with a monitor or display 153. And, in the test mode, the control means 151 sends a signal to the first motor 135a and second motor 135b.

In the test mode, the control means 151 sends a pumping signal to the second motor 135b, sends a close signal to the switchable valve 141 to cause the fluid in the second pump chamber 115b to be placed under a pressure. The second pressure measuring device 139b determines a minimal pressure and sends a minimal pressure
5 signal to the control means. Preferably, the control means 151 compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump 111 or solution failure.

Preferably, the second pressure measuring device 139b determines at least one first
10 threshold pressure at a first time and at least one second threshold pressure at a second time. The second pressure measuring device 139b sends a first threshold pressure signal and a second threshold pressure signal to the control means 151. The control means 151 calculates the slope of a line representing the difference of the first threshold pressure signal and the second threshold pressure signal over time and compares the slope with a
15 threshold decay value, where the threshold decay value represents a defect, most likely associated with a leak, in the pump 111. The control means 151 sends one or more error messages to the operator in response to the slope exceeding the threshold decay value or failure to attain the minimal acceptable value indicating one or more defects in the pump 111, such as, leaks in the check valve 171b or the pump apparatus 111 in fluid
20 communication with the second pump chamber 115b under pressure.

In the alternative or in addition, in the test mode, the control means 151 sends a pumping signal to the first motor 135a, sends a close signal to the switchable valve 141 to cause the fluid in the first pump chamber 115a to be placed under a pressure. The first pressure measuring device 139a determines a minimal pressure and sends a first minimal
25 pressure signal to the control means 151. Preferably, the control means 151 compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure.

The first pressure measuring device 139a determines at least one second pressure
30 at a second time and sends a second pressure signal to the control means 151. The control means 151 calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value. The threshold decay value represents a defect, most likely associated with a

leak in the pump 111. The control means 151 sends one or more error messages to the operator in response to the slope exceeding the threshold decay value indicating one or more defects in the pump 111, such as, leaks in the inlet valve 127 or the pump apparatus 111 in fluid communication with the first pump chamber 115a under pressure.

5 Preferably, the control means 151 receives a first set of pressure values from the first pressure measuring device 139a and a second set of pressure values from the second pressure measuring device 139b and compares the values to determine errors in the performance of the pressure measuring devices or leaks in the apparatus 111.

10 In operation, in the test mode, the control means 151 sends a pumping signal to the second motor 135b, sends a close signal to the switchable valve 141 to cause the fluid in the second chamber 115b to be placed under a pressure. The second pressure measuring device 139b determines a minimal pressure and sends a first pressure signal to the control means 151. Preferably, the control means 151 compares the minimal pressure with a minimal acceptable value. The minimal acceptable value represents a value which is
15 related to acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump.

 Preferably, the second pressure measuring device 139b determines at least one first threshold pressure at a first time and at least one second threshold pressure at a second time. The first pressure measuring device 139b sends a first threshold pressure signal and
20 a second threshold pressure signal to the control means 151. The control means 151 calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value, representing a defect, most likely associated with a leak in the pump 111. The control means 151 sends one or more error messages to the operator in response to the slope
25 exceeding the threshold value or indicating one or more leaks in the check valve 171b or the pump apparatus 111 in fluid communication with the second pump chamber 115b under pressure.

 Preferably, in the test mode, the control means 151 sends a pumping signal to the first motor 135a, and sends a close signal to the switchable valve 141 to cause the fluid in
30 the first chamber 115a to be placed under a pressure. The first pressure measuring device 139a determines a minimal pressure and sends a minimal pressure signal to the control means 151. Preferably, the control means 151 compares the first pressure with a minimal acceptable value. The minimal acceptable value represents a value which is related to

acceptable pump performance. Failure to attain such minimal acceptable value suggests a defect in the pump or solution failure.

Preferably, the first pressure measuring device 139a determines at least one first threshold pressure at a first time and at least one second threshold pressure at a second
5 time. The first pressure measuring device 139a sends a first threshold pressure signal and a second threshold pressure signal to the control means 151. The control means 151 calculates the slope of a line representing the difference of the first pressure signal and the second pressure signal over time and compares the slope with a threshold decay value, representing a defect, most likely associated with a leak in the pump. The control means
10 151 sends one or more error messages to the operator in response to the slope exceeding the threshold value or a failure to attain the minimal acceptable value, indicating one or more defect in the pump 111, such as, leaks in the inlet valve 127 or the pump apparatus 111 in fluid communication with the first pump chamber 115a under pressure.

Preferably, the control means 151 receives a first set of pressure values from the
15 first pressure measuring device 139a and a second set of pressure values from the second pressure measuring device 139b and compares the values to determine errors in the performance of the pressure measuring devices 139a and 139b or leaks in the apparatus 111.

Embodiments of the present invention are useful in pumps in a parallel
20 configuration. Figure 3 depicts a pumping apparatus, generally designated by the numeral 211, of the parallel type. The pumping apparatus 211 has two pump chambers in parallel, a first pump chamber 215a and a second pump chamber 215b. The first pump chamber 215a receives fluid from a fluid supply 223 via a first inlet valve 237a and conduits 225a, 225b and 225c. The second pump chamber 215b receives fluid from fluid supply 223 via
25 a second inlet valve 237b via conduits 225a, 225b and 225d. The first pumping chamber 215a discharges fluid via a first outlet check valve 239a and via conduit 233a. The second pumping chamber 215b discharges fluid via a second outlet check valve 239b via conduit 233b. The first outlet check valve 239a and the second outlet check valve 239b are in fluid communication with the switchable valve 241 via conduits 271 which form a "T".
30 From the switchable valve, fluid flows to a chromatographic column 227, detector 229 and a waste receptacle 231 through conduits 233a, 233b and 233c.

As depicted, the apparatus 211 further comprises two pressure measuring devices 251a and 251b and two motors 235a and 235b. The motors comprise a first motor 235a

mechanically linked to the first pump chamber 215a and a second motor 235b mechanically linked to the second pump chamber 215b. The two pressure measuring devices comprise a first pressure measuring device 251a and a second pressure measuring device 251b. The first pressure measuring device 251a is interposed in fluid communication between the first pumping chamber 215a and the first check valve 239a. The second pressure measuring device 251b is interposed in fluid communication between the second pumping chamber 215b and the second check valve 239b. The two pressure measuring devices 251a and 251b allow the first pump chamber 215a and the second pump chamber 215b to be placed in test mode independent of each other.

10 The apparatus 211 further comprises control means 261 for receiving the pressure signals via lines 271a and 271b, for sending a close signal to the switchable valve 241 via line 281 and for sending a pumping signal to the motors 235a and 235b via lines 285a and 285b. The control means 261 is preferably a computer equipped with a monitor or display 263.

15 In the test mode, the control means 261 directs one of the motors 235a or 235b to go into pumping mode which places one of the first or second pump chamber 215a or 215b under pressure and such apparatus in fluid communication with the pump chamber under pressure through to the opposite check valve 239a or 239b. In this manner, the outlet check valve of the opposite pump chamber can be tested in a parallel pump. And, of course, in the test mode, first one motor of one pump chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of both outlet check valves 239a or 239b.

25 Preferably, the control means receives a first set of pressure values from the first pressure measuring device 251a and a second set of pressure values from the second pressure measuring device 251b and compares the values. Differences in the values suggest errors in the performance of the pressure measuring devices, the first or second pump chambers 215a or 215b, the first and second inlet valves 237a or 237b or the outlet check valves 239a or 239b. These values can also be compared to predetermined minimal acceptable values. Where the test values comprise a first pressure and a second pressure reading separated by time, the test values are compared to threshold decay values as described previously.

30 In operation, in the test mode, the control means 261 directs one of the motors 235a or 235b to go into pumping mode which places one of the first or second pump

chamber 215a or 215b under pressure and such apparatus in fluid communication with the pump chamber under pressure through the opposite check valve 239a or 239b. The test mode allows testing of the outlet check valve of the opposite pump chamber. And, in the test mode first one motor of one pump chamber is placed in pump mode and then the
5 opposite motor of the opposite pump chamber is placed in pump mode to allow testing of both outlet check valves.

Turning now to Figure 4, such figure depicts the functional behavior of a test mode of one half of the hydraulic circuit of a parallel pump, measuring pressure over time. During the period T_0 to T_1 the control means 261 switches switchable valve 141 to close,
10 directs one of the motors 235a or 235b to go into pumping mode which places one of the first or second pump chamber 215a or 215b under pressure and such apparatus in fluid communication with the pump chamber under pressure through to the opposite check valve 239a or 239b.

The period T_0 to T_1 is a period of course compression. The purpose of the course
15 compression is to quickly bring the hydraulic circuit to approximately the pressure at which the pump will operate or the minimal acceptable pressure. Following the period of course compression, the control means 261 directs the motor to go into a pumping mode that is more tightly controlled. This period between T_1 and T_2 , a period of fine compression is intended to bring the system to at least a minimal acceptable pressure. A
20 pressure value from the first pressure measuring device 251a or from the second pressure measuring device 251b is obtained at or about T_2 . Control means 261 compares the value to a minimal acceptable value. Failure to attain this value during the period T_1 and T_2 suggests a defect in the pump 111.

During the period T_2 to T_4 the control means 261 directs the motors 235 a or 235b
25 to remain static. Typically, this period is approximately 0.1 to 5 minutes, and, most preferably, 0.2 to 1.0 minutes. At T_3 a further threshold pressure value is obtained from the first pressure measuring device 251a or from the second pressure measuring device 251b. And, at T_4 a further threshold pressure value is obtained. Control means 261 calculates the slope of a line between the pressure values taken at T_3 and T_4 . If the
30 pressure values are taken continuous over such period, the values assume a curve sloping downward, representing a typical decay of pressure over time. In the event a leak was present, the curve would assume a more distinct downward slope. The value at T_3 and T_4 would be substantially lower than depicted. The slope of the calculated line is compared

to the threshold decay value represented by the dotted line extending between T_2 and T_4 . This slope is illustrated for discussion purposes with the actual value being determined empirically. If the slope of the calculated line greater than the threshold value, control means 261 sends an error message.

5 Having completed the test, if acceptable values are achieved the pump 111 can assume normal pumping operation. To enter pumping mode, during the period T_3 to T_4 , the control means 261 depressurizes the hydraulic circuit by backing off the pistons or by switching the switchable valve 141 to open.

10 The profile depicted in Figure 4 corresponds to a pump having a pump chamber with a 1200 microliter capacity. As depicted in Figure 4, the pressure attained during the course compression period is 250.0 psig. The normal flow rate for the pump, if valves were open, which they are not would be 3.0 ml per minute. The period of ^{Time} in which the decay rate slope is calculated is 0.5 minute. The decay rate limit is 300 psig per minute.

15 Thus, features of the present invention have been described with the understanding that the description is an exemplification of the invention and the invention should not be so limited. The invention is described more fully in the claims which follow.

CLAIMS

What is Claimed is:

5 1. A pumping apparatus for pumping fluid comprising:

at least one pumping chamber having an inlet and an outlet, said pumping chamber having a piston for movement in said chamber which piston propels said fluid from said chamber, said inlet for receiving fluid from a fluid supply and said outlet for discharging
10 said fluid from said chamber;

at least one motor for powering said piston in said pumping chamber, said motor operating in pumping mode upon receiving a pumping signal;

15 at least one inlet valve in fluid communication with said inlet of said pumping chamber, said inlet valve having an open position and a closed position;

at least one switchable valve in fluid communication with said outlet of said pumping chamber, said at least one switchable valve having a closed position and an open
20 position, and said at least one switchable valve assuming said closed position upon receiving a close signal;

at least one first pressure measuring device in fluid communication with said pumping chamber, between said inlet valve and switchable valve, said at least one
25 pressure measuring device producing a pressure signal in response to pressure;

control means for receiving said pressure signal, for sending a close signal to said at least one switchable valve and for sending a pumping signal to said motor, said control means having a test mode in which said control means send a pumping signal to said
30 motor, sends a close signal to said switchable valve to cause said fluid in said chamber to be placed under a pressure, said first pressure measuring device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said first pressure measuring device determining at least one second

threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of a line representing the difference of said first threshold pressure signal and said second threshold pressure signal over time and comparing said slope with a threshold value, said threshold value
5 representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value.

2. The apparatus of claim 1 further comprising a check valve interposed in fluid communication between said at least one pump chamber and said switchable valve.
10

3. The apparatus of claim 1 wherein said apparatus has a start up mode in which said control means is turned on and said control means engages said test mode upon start up to test for leaks.

4. The apparatus of claim 1 further comprising two pump chambers said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump chamber in series with said first pump chamber receiving fluid from a fluid supply and in fluid communication with said second chamber to discharge said fluid to said second chamber, and at least one check valve interposed in fluid communication
20 with said first pump chamber and said second pump chamber.

5. The apparatus of claim 4 further comprising two motors, a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, wherein in said test mode said control means sends a signal to said first
25 motor and second motor.

6. The apparatus of claim 5 wherein in said test mode said control means sends a pumping signal to said second motor, sends a close signal to said switchable valve to cause said fluid in said second chamber to be placed under a pressure, said first pressure measuring
30 device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said first pressure measuring device determining at least one second threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of a line

representing the difference of said first threshold pressure signal and said second threshold pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value

5 indicating one or more leaks in said check valve or said pump apparatus in fluid communication with the second pump chamber under pressure.

7. The apparatus of claim 5 wherein in said test mode said control means sends a pumping signal to said first motor, sends a close signal to said switchable valve to cause said fluid

10 in said first chamber to be placed under a pressure, said first pressure measuring device determining a first threshold pressure at a first time and sending a first pressure signal to said control means, said first pressure measuring device determining at least one second threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of a line representing the

15 difference of said first threshold pressure signal and said second threshold pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value indicating one or more leaks in said inlet valve or said pump apparatus in fluid communication with the first

20 pump chamber under pressure.

8. The apparatus of claim 4 further comprising a second pressure measuring device interposed in fluid communication between said first pump chamber and said check valve, wherein in said test mode said control means sends a pumping signal to said first motor, to

25 cause said fluid in said first chamber to be placed under a pressure, said second pressure measuring device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said second pressure measuring device determining at least one second threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of

30 a line representing the difference of said first pressure signal and said second pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value indicating one or

more leaks in said inlet valve or check valve or said pump apparatus in fluid communication with the first pump chamber under pressure.

9. The apparatus of claim 8 wherein said control means sends a close signal to said switchable valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine errors in the performance of said pressure measuring devices or leaks in the apparatus.
10. The apparatus of claim 1 further comprising two pump chambers, two inlet valves and two outlet valves, said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump chamber in parallel with said first pump chamber receiving fluid from a fluid supply via a first inlet valve and said second pump chamber receiving fluid from a fluid supply via a second inlet valve, said first pumping chamber discharging said fluid via a first outlet check valve and said second pumping chamber discharging said fluid via a second outlet check valve, said first outlet check valve and said second outlet check valve in fluid communication with said switchable valve.
11. The apparatus of claim 10 further comprising two pressure measuring devices and two motors, said motors comprising a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, said two pressure measuring devices comprising a first pressure measuring device and a second pressure measuring device, said first pressure measuring device interposed in fluid communication between said first pumping chamber and said first check valve and said second pressure measuring device interposed in fluid communication between said second pumping chamber and said second check valve, to allow said first pump chamber and said second pump chamber to be placed in test mode independent of each other.
12. The apparatus of claim 11 wherein in said test mode said control means directs one of said motors to go into pumping mode which places one of said first or second pump chamber under pressure and such apparatus in fluid communication with said pump

chamber under pressure through said opposite check valve, to allow testing of the outlet check valve of the opposite pump chamber.

13. The apparatus of claim 12 wherein in said test mode first one motor of on pump
5 chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of the two outlet check valves.

14. The apparatus of claim 11 wherein said control means sends a close signal to said
10 outlet valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine errors in the performance of at least one of the following components selected from the group consisting of said pressure measuring devices, said first or second pump chambers, said first and second inlet valves and said outlet check valve.

15

15. A method of testing the performance of a pumping apparatus for pumping fluid comprising:

20 at least one pumping chamber having an inlet and an outlet, said pumping chamber having a piston for movement in said chamber which piston propels said fluid from said chamber, said inlet for receiving fluid from a fluid supply and said outlet for discharging said fluid from said chamber;

25 at least one motor for powering said piston in said pumping chamber, said motor operating in pumping mode upon receiving a pumping signal;

at least one inlet valve in fluid communication with said inlet of said pumping chamber, said inlet valve having an open position and a closed position;

30 at least one switchable valve in fluid communication with said outlet of said pumping chamber, said at least one switchable valve having a closed position and an open position, and said at least one switchable valve assuming said closed position upon receiving a close signal;

at least one first pressure measuring device in fluid communication with said pumping chamber, between said inlet valve and switchable valve, said at least one pressure measuring device producing a pressure signal in response to pressure;

5

control means for receiving said pressure signal, for sending a close signal to said at least one switchable valve and for sending a pumping signal to said motor, said control means having a test mode in which said control means send a pumping signal to said motor, sends a close signal to said switchable valve to cause said fluid in said chamber to be placed under a pressure, said first pressure measuring device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said first pressure measuring device determining at least one second threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of a line representing the difference of said first pressure signal and said second pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value; said method comprising the steps of operating said apparatus in test mode.

20

16. The method of claim 15 wherein said apparatus further comprises a check valve interposed in fluid communication between said at least one pump chamber and said switchable valve.

25 17. The method of claim 15 wherein said apparatus has a start up mode in which said control means is turned on and said control means engages said test mode upon start up to test for leaks.

30 18. The method of claim 15 wherein said apparatus further comprises two pump chambers said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump chamber in series with said first pump chamber receiving fluid from a fluid supply and in fluid communication with said second chamber

to discharge said fluid to said second chamber, and at least one check valve interposed in fluid communication with said first pump chamber and said second pump chamber.

19. The method of claim 15 wherein said apparatus further comprising two motors, a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, wherein in said test mode said control means sends a signal to said first motor and second motor.

20. The method of claim 19 wherein in said test mode said control means sends a pumping signal to said second motor, sends a close signal to said switchable valve to cause said fluid in said second chamber to be placed under a pressure, said first pressure measuring device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said first pressure measuring device determining at least one second threshold pressure at a second time and sending a second threshold pressure signal to said control means, said control means calculating the slope of a line representing the difference of said first threshold pressure signal and said second threshold pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value indicating one or more leaks in said check valve or said pump apparatus in fluid communication with the second pump chamber under pressure.

21. The apparatus of claim 19 wherein in said test mode said control means sends a pumping signal to said first motor, sends a close signal to said switchable valve to cause said fluid in said first chamber to be placed under a pressure, said first pressure measuring device determining a first threshold pressure at a first time and sending a first threshold pressure signal to said control means, said first pressure measuring device determining at least one second threshold pressure at a second time and sending a second pressure signal to said control means, said control means calculating the slope of a line representing the difference of said first threshold pressure signal and said second threshold pressure signal over time and comparing said slope with a threshold value, said threshold value representing a leak in the pump, said control means sending one or more error messages to the operator in response to said slope exceeding said threshold value indicating one or

more leaks in said inlet valve or said pump apparatus in fluid communication with the first pump chamber under pressure.

22. The method of claim 18 further wherein said apparatus further comprises a second
5 pressure measuring device interposed in fluid communication between said first pump
chamber and said check valve, wherein in said test mode said control means sends a
pumping signal to said first motor, to cause said fluid in said first chamber to be placed
under a pressure, said second pressure measuring device determining a first threshold
10 pressure at a first time and sending a first threshold pressure signal to said control means,
said second pressure measuring device determining at least one second threshold pressure
at a second time and sending a second threshold pressure signal to said control means, said
control means calculating the slope of a line representing the difference of said first
threshold pressure signal and said second threshold pressure signal over time and
15 comparing said slope with a threshold value, said threshold value representing a leak in the
pump, said control means sending one or more error messages to the operator in response
to said slope exceeding said threshold value indicating one or more leaks in said inlet
valve or check valve or said pump apparatus in fluid communication with the first pump
chamber under pressure.

20 23. The method of claim 22 wherein said control means sends a close signal to said
switchable valve, and said control means receives a first set of pressure values from said
first pressure measuring device and a second set of pressure values from said second
pressure measuring device and compares said values to determine errors in the
performance of said pressure measuring devices or leaks in the apparatus.

25 24. The method of claim 15 wherein said apparatus further comprises two pump
chambers, two inlet valves and two outlet valves, said pump chambers comprising a first
pump chamber and a second pump chamber said first pump chamber and second pump
chamber in parallel with said first pump chamber receiving fluid from a fluid supply via a
30 first inlet valve and said second pump chamber receiving fluid from a fluid supply via a
second inlet valve, said first pumping chamber discharging said fluid via a first outlet
check valve and said second pumping chamber discharging said fluid via a second outlet

check valve, said first outlet check valve and said second outlet check valve in fluid communication with said switchable valve.

25. The method of claim 24 wherein said apparatus further comprising two pressure measuring devices and two motors, said motors comprising a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, said two pressure measuring devices comprising a first pressure measuring device and a second pressure measuring device, said first pressure measuring device interposed in fluid communication between said first pumping chamber and said first check valve and said second pressure measuring device interposed in fluid communication between said second pumping chamber and said second check valve, to allow said first pump chamber and said second pump chamber to be placed in test mode independent of each other.

26. The method of claim 25 wherein in said test mode said control means directs one of said motors to go into pumping mode which places one of said first or second pump chamber under pressure and such apparatus in fluid communication with said pump chamber under pressure through said opposite check valve, to allow testing of the outlet check valve of the opposite pump chamber.

27. The method of claim 26 wherein in said test mode first one motor of on pump chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of the two outlet check valves.

28. The method of claim 27 wherein said control means sends a close signal to said outlet valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine errors in the performance of at least one of the following components selected from the group consisting of said pressure measuring devices, said first or second pump chambers, said first and second inlet valves and said outlet check valve.

29. A pumping apparatus for pumping fluid comprising:

at least one pumping chamber having an inlet and an outlet, said pumping chamber having a piston for movement in said chamber which piston propels said fluid from said chamber, said inlet for receiving fluid from a fluid supply and said outlet for discharging
5 said fluid from said chamber;

at least one motor for powering said piston in said pumping chamber, said motor operating in pumping mode upon receiving a pumping signal;

10 at least one inlet valve in fluid communication with said inlet of said pumping chamber, said inlet valve having an open position and a closed position;

at least one switchable valve in fluid communication with said outlet of said pumping chamber, said at least one switchable valve having a closed position and an open
15 position; and said at least one switchable valve assuming said closed position upon receiving a close signal;

at least one first pressure measuring device in fluid communication with said pumping chamber, between said inlet valve and switchable valve, said at least one
20 pressure measuring device producing a pressure signal in response to pressure;

control means for receiving said pressure signal, for sending a close signal to said at least one switchable valve and for sending a pumping signal to said motor, said control means having a test mode in which said control means send a pumping signal to said
25 motor, sends a close signal to said switchable valve to cause said fluid in said chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure and sending a minimal pressure signal to said control means, said control means comparing said first pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error
30 messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

30. The apparatus of claim 29 further comprising a check valve interposed in fluid communication between said at least one pump chamber and said switchable valve.

31. The apparatus of claim 29 wherein said apparatus has a start up mode in which said control means is turned on and said control means engages said test mode upon start up to test for defects.

32. The apparatus of claim 29 further comprising two pump chambers said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump chamber in series with said first pump chamber receiving fluid from a fluid supply and in fluid communication with said second chamber to discharge said fluid to said second chamber, and at least one check valve interposed in fluid communication with said first pump chamber and said second pump chamber.

33. The apparatus of claim 32 further comprising two motors, a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, wherein in said test mode said control means sends a signal to said first motor and second motor.

34. The apparatus of claim 33 wherein in said test mode said control means sends a pumping signal to said second motor, sends a close signal to said switchable valve to cause said fluid in said second chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure and sending a minimal pressure signal to said control means, said control means comparing said minimal pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

35. The apparatus of claim 33 wherein in said test mode said control means sends a pumping signal to said first motor, sends a close signal to said switchable valve to cause said fluid in said first chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure and sending a minimal pressure signal to said control means, said control means comparing said minimal pressure signal to minimal

acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

- 5 36. The apparatus of claim 32 further comprising a second pressure measuring device interposed in fluid communication between said first pump chamber and said check valve, wherein in said test mode said control means sends a pumping signal to said first motor, to cause said fluid in said first chamber to be placed under a pressure, said second pressure measuring device determining a minimal pressure and sending a minimal pressure signal
- 10 to said control means, said control means comparing said minimal pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.
- 15 37. The apparatus of claim 36 wherein said control means sends a close signal to said switchable valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine defects in the apparatus.
- 20 38. The apparatus of claim 29 further comprising two pump chambers, two inlet valves and two outlet valves, said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump chamber in parallel with said first pump chamber receiving fluid from a fluid supply via a first inlet valve and said second pump chamber receiving fluid from a fluid supply via a second inlet valve, said
- 25 first pumping chamber discharging said fluid via a first outlet check valve and said second pumping chamber discharging said fluid via a second outlet check valve, said first outlet check valve and said second outlet check valve in fluid communication with said switchable valve.
- 30 39. The apparatus of claim 38 further comprising two pressure measuring devices and two motors, said motors comprising a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, said two pressure measuring devices comprising a first pressure measuring device and a second

pressure measuring device, said first pressure measuring device interposed in fluid communication between said first pumping chamber and said first check valve and said second pressure measuring device interposed in fluid communication between said second pumping chamber and said second check valve, to allow said first pump chamber and said second pump chamber to be placed in test mode independent of each other.

40. The apparatus of claim 39 wherein in said test mode said control means directs one of said motors to go into pumping mode which places one of said first or second pump chamber under pressure and such apparatus in fluid communication with said pump chamber under pressure through said opposite check valve, to allow testing of the outlet check valve of the opposite pump chamber.

41. The apparatus of claim 40 wherein in said test mode first one motor of on pump chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of the two outlet check valves.

42. The apparatus of claim 40 wherein said control means sends a close signal to said outlet valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine defects in the apparatus.

43. A method of testing the performance of a pumping apparatus for pumping fluid comprising:

25 at least one pumping chamber having an inlet and an outlet, said pumping chamber having a piston for movement in said chamber which piston propels said fluid from said chamber, said inlet for receiving fluid from a fluid supply and said outlet for discharging said fluid from said chamber;

30 at least one motor for powering said piston in said pumping chamber, said motor operating in pumping mode upon receiving a pumping signal;

at least one inlet valve in fluid communication with said inlet of said pumping chamber, said inlet valve having an open position and a closed position;

5 at least one switchable valve in fluid communication with said outlet of said pumping chamber, said at least one switchable valve having a closed position and an open position, and said at least one switchable valve assuming said closed position upon receiving a close signal;

10 at least one first pressure measuring device in fluid communication with said pumping chamber, between said inlet valve and switchable valve, said at least one pressure measuring device producing a pressure signal in response to pressure;

control means for receiving said pressure signal, for sending a close signal to said at least one switchable valve and for sending a pumping signal to said motor, said control
15 means having a test mode in which said control means send a pumping signal to said motor, sends a close signal to said switchable valve to cause said fluid in said chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure and sending a minimal pressure signal to said control means, said control means comparing said minimal pressure signal to a minimal acceptable value, said minimal
20 acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

44. The method of claim 43 wherein said apparatus further comprises a check valve
25 interposed in fluid communication between said at least one pump chamber and said switchable valve.

45. The method of claim 43 wherein said apparatus has a start up mode in which said control means in turned on and said control means engages said test mode upon start up to
30 test for defects.

46. The method of claim 43 wherein said apparatus further comprises two pump chambers said pump chambers comprising a first pump chamber and a second pump chamber said

first pump chamber and second pump chamber in series with said first pump chamber receiving fluid from a fluid supply and in fluid communication with said second chamber to discharge said fluid to said second chamber, and at least one check valve interposed in fluid communication with said first pump chamber and said second pump chamber.

5

47. The method of claim 43 wherein said apparatus further comprising two motors, a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second pump chamber, wherein in said test mode said control means sends a signal to said first motor and second motor.

10

48. The method of claim 47 wherein in said test mode said control means sends a pumping signal to said second motor, sends a close signal to said switchable valve to cause said fluid in said second chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure and sending a minimal pressure signal to said control means, said control means comparing said minimal pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

15

49. The apparatus of claim 47 wherein in said test mode said control means sends a pumping signal to said first motor, sends a close signal to said switchable valve to cause said fluid in said first chamber to be placed under a pressure, said first pressure measuring device determining a minimal pressure at a first time and sending a minimal pressure signal to said control means, said control means comparing said minimal pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said minimal acceptable value.

20

25

50. The method of claim 46 further wherein said apparatus further comprises a second pressure measuring device interposed in fluid communication between said first pump chamber and said check valve, wherein in said test mode said control means sends a pumping signal to said first motor, to cause said fluid in said first chamber to be placed under a pressure, said second pressure measuring device determining a minimal pressure

30

and sending a minimal pressure signal to said control means, said control means comparing said first pressure signal to minimal acceptable value, said minimal acceptable value representing a defect in the pump, said control means sending one or more error messages to the operator in response to said first pressure signal failing to attain said
5 minimal acceptable value.

51. The method of claim 50 wherein said control means sends a close signal to said switchable valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second
10 pressure measuring device and compares said values to determine defects in the apparatus.

52. The method of claim 43 wherein said apparatus further comprises two pump chambers, two inlet valves and two outlet valves, said pump chambers comprising a first pump chamber and a second pump chamber said first pump chamber and second pump
15 chamber in parallel with said first pump chamber receiving fluid from a fluid supply via a first inlet valve and said second pump chamber receiving fluid from a fluid supply via a second inlet valve, said first pumping chamber discharging said fluid via a first outlet check valve and said second pumping chamber discharging said fluid via a second outlet check valve, said first outlet check valve and said second outlet check valve in fluid
20 communication with said switchable valve.

53. The method of claim 52 wherein said apparatus further comprising two pressure measuring devices and two motors, said motors comprising a first motor mechanically linked to said first pump chamber and a second motor mechanically linked to said second
25 pump chamber, said two pressure measuring devices comprising a first pressure measuring device and a second pressure measuring device, said first pressure measuring device interposed in fluid communication between said first pumping chamber and said first check valve and said second pressure measuring device interposed in fluid communication between said second pumping chamber and said second check valve, to allow said first
30 pump chamber and said second pump chamber to be placed in test mode independent of each other.

54. The method of claim 53 wherein in said test mode said control means directs one of said motors to go into pumping mode which places one of said first or second pump chamber under pressure and such apparatus in fluid communication with said pump chamber under pressure through said opposite check valve, to allow testing of the outlet
5 check valve of the opposite pump chamber.

55. The method of claim 54 wherein in said test mode first one motor of on pump chamber is placed in pump mode and then the opposite motor of the opposite pump chamber is placed in pump mode to allow testing of the two outlet check valves.

10

56. The method of claim 55 wherein said control means sends a close signal to said outlet valve, and said control means receives a first set of pressure values from said first pressure measuring device and a second set of pressure values from said second pressure measuring device and compares said values to determine defects.

15

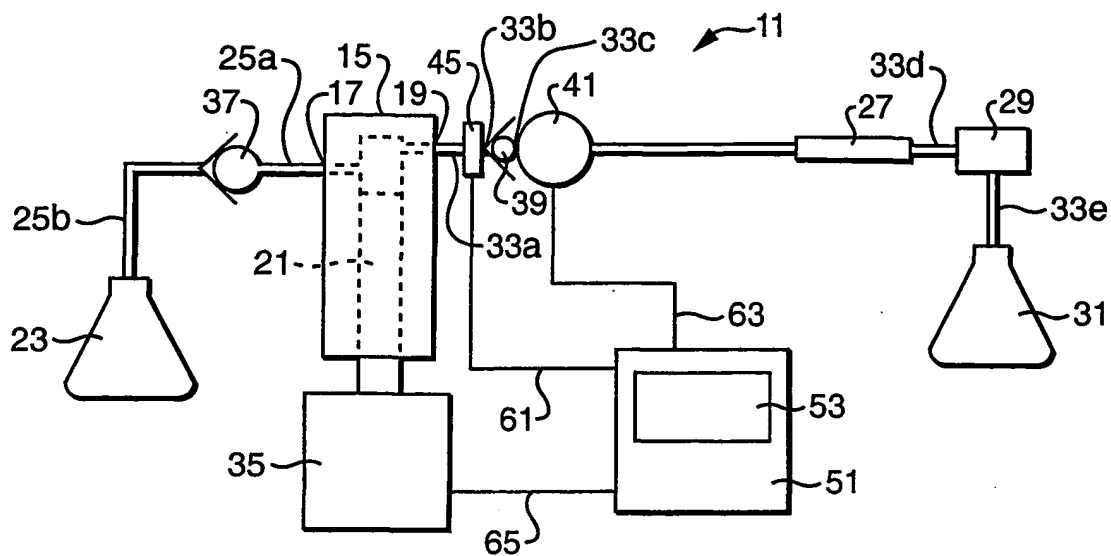


FIG. 1

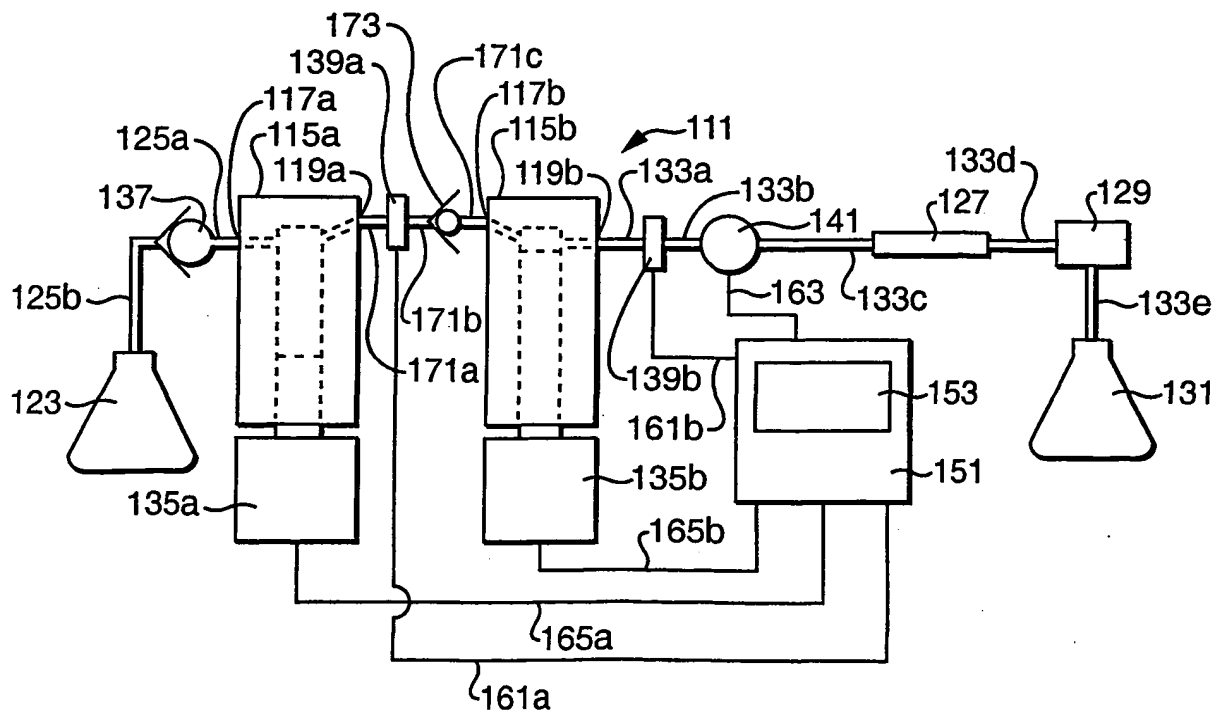


FIG. 2

THIS PAGE BLANK (USPTO)

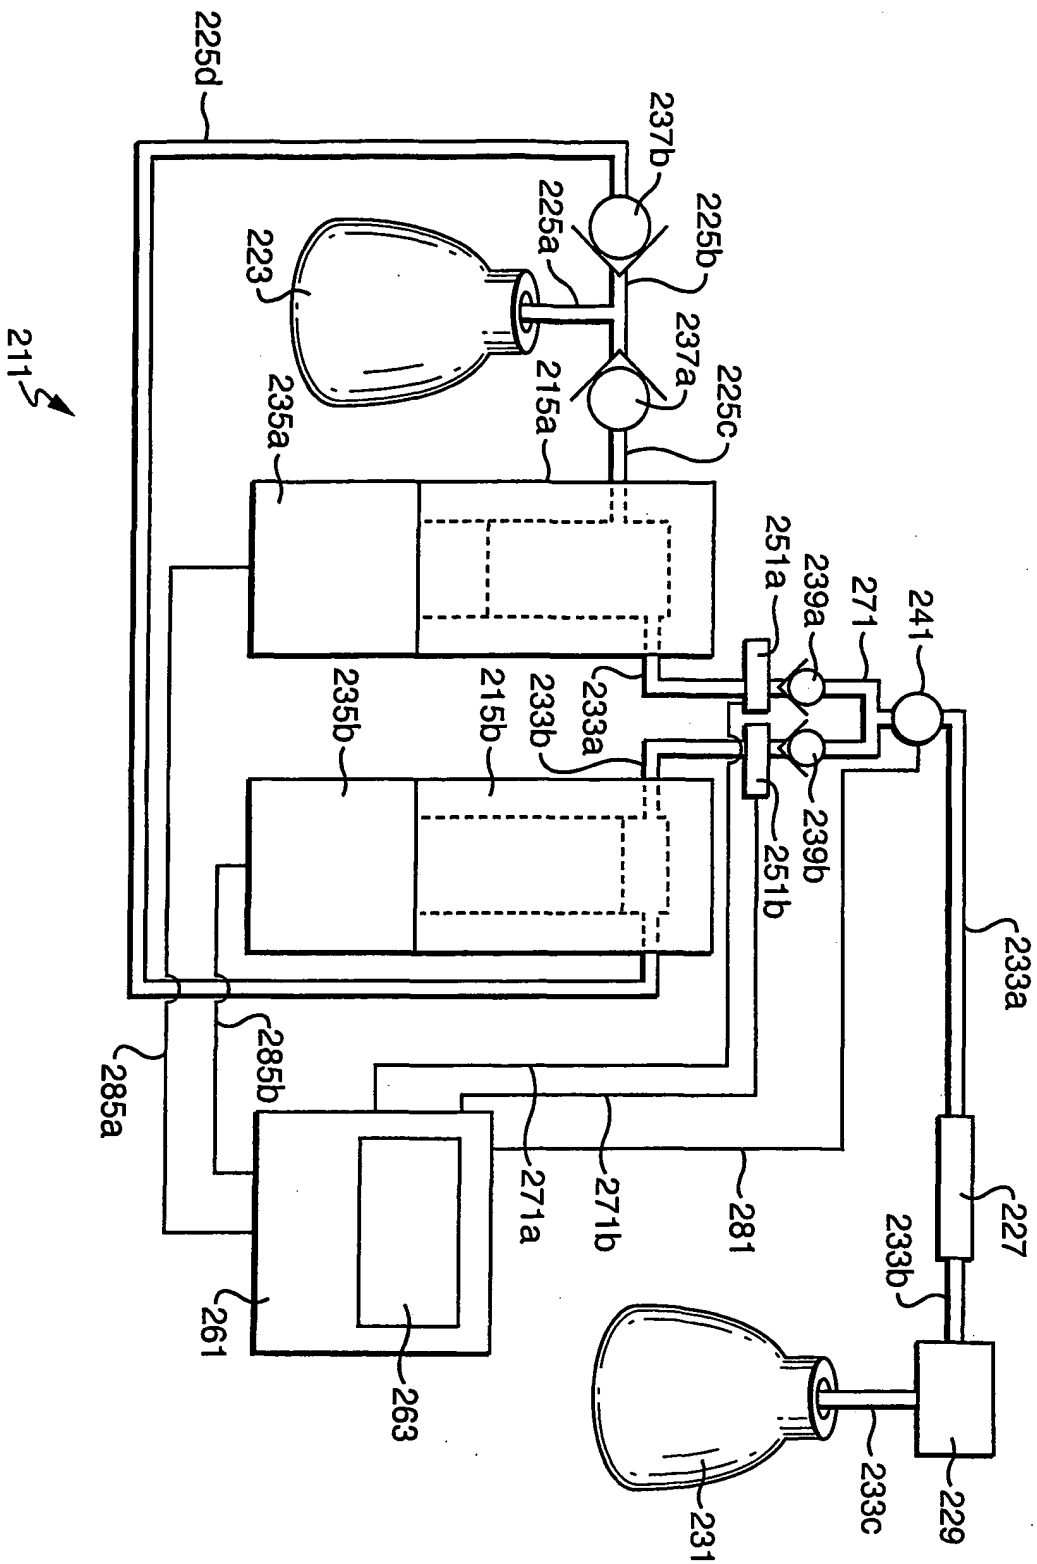


FIG. 3

THIS PAGE BLANK (USPTO)

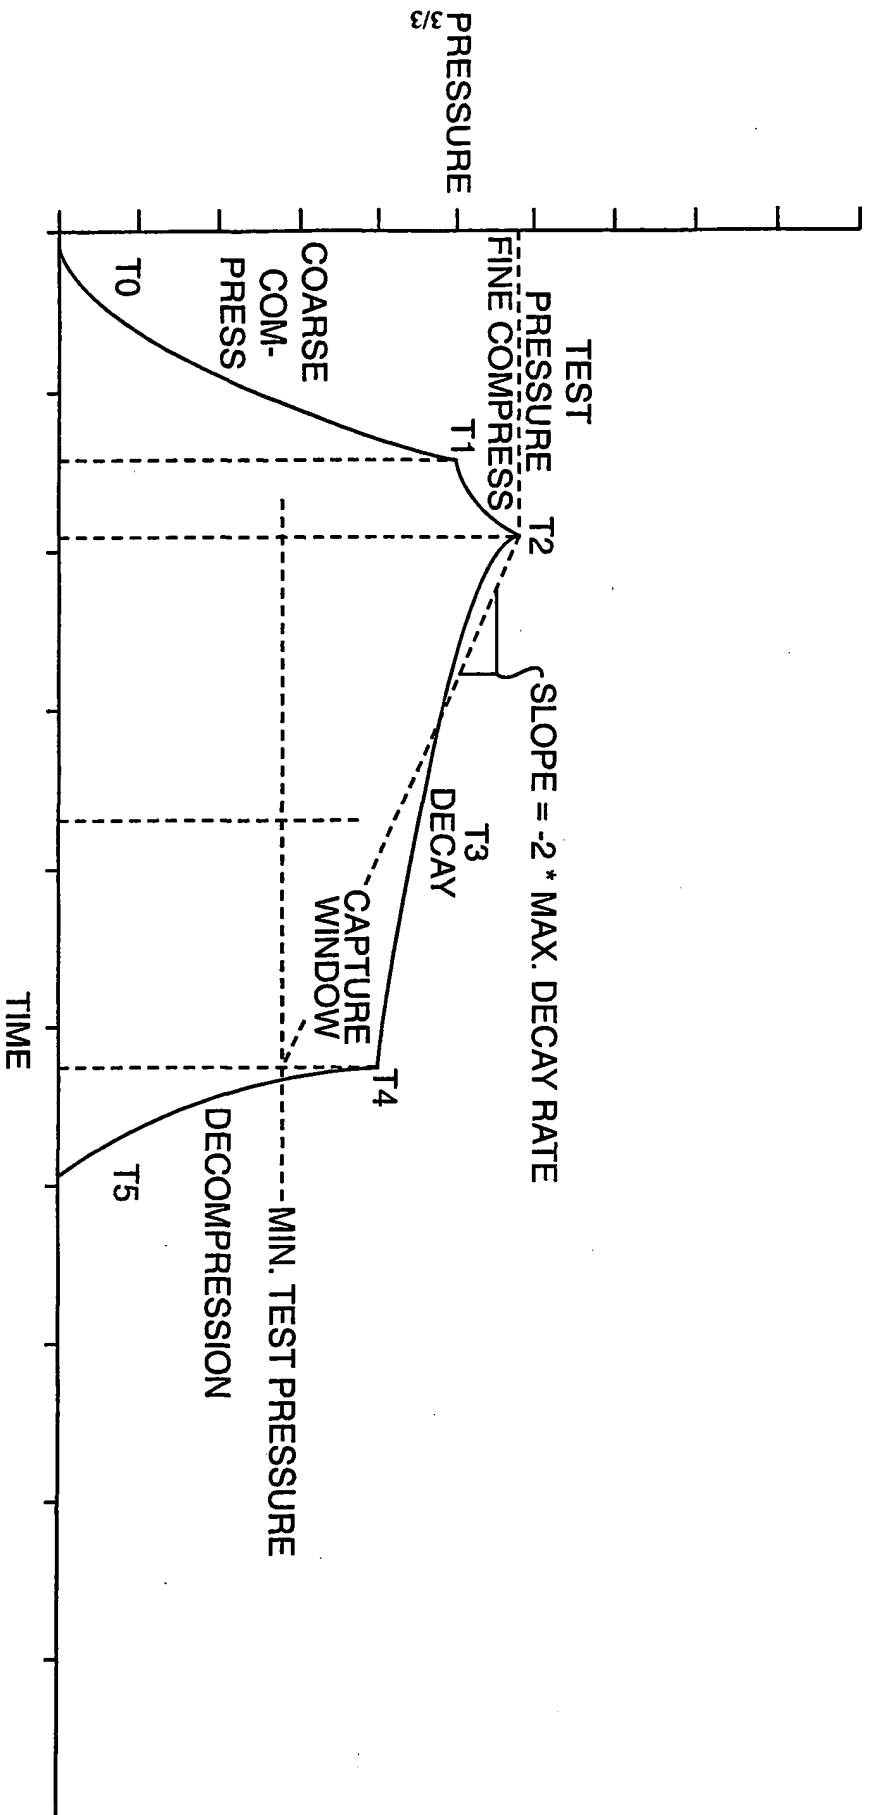


FIG. 4

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/US02/06540
A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01M 03/26, 03/20, 03/00; F04B 51/00, 21/02; G08B 21/00

US CL : 073/40.00, 037, 01.68, 864.35; 340/611

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 073/40.00, 037, 01.68, 01.59, 864.35, 864.16, 864.87, 863.84; 340/611, 605

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6,094,970 A (SPRENGER et al.) 01 August 2000 (01.08.00) see entire document.	1-14 and 15-28
A	US 5,770,794 A (DAVEY) 23 June 1998 (23.06.98) see entire document.	29-42 and 43-56
A	US 5,383,351 A (KOTLYAR) 24 January 1995 (24.01.95), see entire document.	1-14 and 15-28
T	US 4,715,214 A (TVETER et al.) 29 December 1987 (29.12.87), see entire document.	1-14, 15-28, 29-42 and 43-56
T	US 4,901,751 A (STORY et al.) 20 February 1990 (20.02.90), see entire document.	1-14 and 15-28
T	US 5,336,053 A (WYNKOOP) 09 August 1994 (09.08.94), see entire document.	15-28 and 43-56

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 JUNE 2002

Date of mailing of the international search report

16 AUG 2002

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

DAVID JOHN WIGGINS

Telephone No. (703) 305-4884

 Deborah Perry Leeper
 Paralegal Specialist

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US02/06540

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
T	US 6,055,851 A (TANAKA et al.) 02 May 2000 (02.05.00), see entire document.	1-14 and 29-42
T	US 5,631,632 A (NAKASHIMA et al.) 20 May 1997 (20.05.97), see entire document.	29-42 and 43-56
A	US 5,439,355 A (JIMISON et al.) 08 August 1995 (08.08.95), see entire document.	1-14 and 15-28
T	US 3,100,986 A (STARR et al.) 20 August 1963 (20.08.63), see entire document.	1-14 and 15-28
A	US 5,336,053 A (WYNKOOP) 09 August 1994 (09.08.94), see entire document.	15-28 and 43-56
T	US 5,817,925 A (COOK et al.) 06 October 1998 (06.10.98), see entire document.	1-28 and 29-56

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US02/06540

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

STN/CAS type APS search terms: piston, pump, chamber, inlet valve, switchable valve, motor, pressure sensor, detector, transducer, probe or gauge; threshold pressure; fluid, water or liquid; slope or gradient; integrity, defects, flaws, leaks or leakage; computer, processor, calculator or programmer; error, alarm or warning;

THIS PAGE BLANK (USPTO)